

Panda



Panda TN

H 205 • 225
P 85 • 100 • 115
L 125 2p • 250 4p • 375 6p

3M1 meat • sandwiches • drinks •
dairy • fresh products

A	G	B	TN	TB	TB/TN	TC	TC/TN	N
Chiller	Freezer	Dual Temp	Heated	Hot/Cold	Hot/Cold	Hot/Cold	Non-refrigerated	
RS - Static	RV - Ventilated							
RS/TC S - Static and Dry Heat convertible	RV/TC S - Ventilated / Dry Heat convertible							
HUR - Meat	CH - Chocolate							
TC S - Dry Heat	TC BM - Bainmarie							
N - Non-refrigerated								

Installation

- Plug-in air-cooled
- Plug-in water-cooled

Temperature range
0 / +2 °C

Refrigerant
• R744
• R290

Refrigeration
Ventilated

Defrost
Compressor off

Climate and product class
3M1

Illumination

- LED lighting on canopy
- Vertical and undershelf LED lighting optional

Side panels

- Panoramic with safety glass
- Blind

Shelves
5 (illumination optional)

Closing system
Double pane glass doors

Base
4 adjustable feet

Installazione

- Plug-in ad aria
- Plug-in ad acqua

Temperatura di esercizio
0 / +2 °C

Refrigerante
• R744
• R290

Refrigerazione
Ventilata

Sbrinatorio
Fermata compressore

Classe climatica e di prodotto
3M1

Illuminazione

- LED superiore
- Illuminazione verticale e sui ripiani optional

Fianchi

- Panoramici con vetro temprato
- Ciechi

Ripiani
5 (illumination optional)

Sistema di chiusura
Porte in vetro camera

Basamento
4 piedini regolabili

Available colours

Colori disponibili

- Standard / Di serie
- On request

Inside

Interno

Bianco

 RAL

Outside

Esterno

 RAL

Side panels

Fianchi

 RAL




Panda TN P85

		125 2P	250 4P	375 6P
External dimensions (LxDxH)	P85	1330 x 850 x 2100 mm	2580 x 850 x 2100 mm	3830 x 850 x 2100 mm
Dimensioni esterne (LxPxH)	P85 HT	1330 x 850 x 2300 mm	2580 x 850 x 2300 mm	3830 x 850 x 2300 mm
Capacity (gross/net)	P85	1220 / 886 lt	2440 / 1772 lt	3661 / 2657 lt
Capacità (lorda/netta)	P85 HT	1377 / 1003 lt	2754 / 2005 lt	4177 / 3007 lt
Net weight (incl. side panels)	P85	405 kg	642 kg	893 kg
Peso netto (con spalle)	P85 HT	442 kg	697 kg	963 kg
Refrigeration		Ventilated Ventilata		
Refrigerant		R744; R290		
Climate class		3		
Operating conditions		25 °C / 60 %RH		
Product temperature		-1 / +5 °C		
Compressor (type)		1 Hermetic 1 Ermetico	2 Hermetics 2 Ermetici	3 Hermetics 3 Ermetici
Defrost		Off Cycle Fermata compressore		
Power supply		230 V / 1 Ph / 50 Hz		

Dimensions include side panels: both panoramic and blind side panels are 40mm thick
Le dimensioni includono le spalle terminali: panoramiche o cieche, entrambi i tipi hanno 40 mm di spessore

PANDA TN	Model type	Total display area	Temperature class	Recommended temperature	Energy class	Energy efficiency index	Annual energy consumption	Light source type and class
P85	Typo di banco	Superficie espositiva totale m²	Classe di temperatura	Temperatura consigliata °C	Classe energetica	Indice di efficienza energetica EEI	Consumo annuo AEC kWh/A	Tipo e classe illuminazione
H205	125 2P	2,96	M1	+2°C	B	17,83	2,893	-
	250 4P	4,78	M1	+2°C	C	20,97	5,092	-
	375 6P	6,60	M1	+2°C	C	22,35	7,135	-
H225	125 2P	3,32	M1	+2°C	B	16,47	2,993	-
	250 4P	5,38	M1	+2°C	B	19,67	5,271	-
	375 6P	7,43	M1	+2°C	C	20,56	7,383	-

Configuration: air-cooled plug-in unit R290, LED canopy lighting, non-illuminated shelves, panoramic end side panels
Configurazione: unità condensante plug-in R290, illuminazione LED superiore, ripiani non illuminati, spalle panoramiche

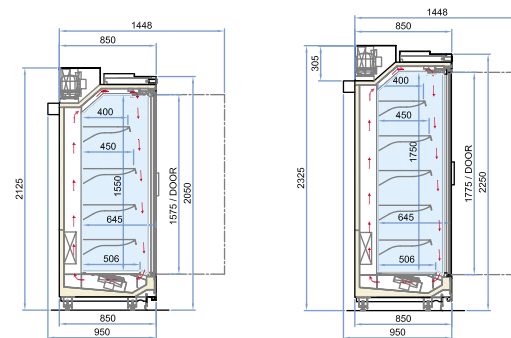


Panda TN P100

	125 2P	250 4P	375 6P	
External dimensions (LxDxH)	100	1330 x 1000 x 2100 mm	2580 x 1000 x 2100 mm	3830 x 1000 x 2100 mm
Dimensioni esterne (LxPxH)	100 HT	1330 x 1000 x 2300 mm	2580x 1000 x 2300 mm	3830 x 1000 x 2300 mm
Capacity (gross/net)	100	1510 / 1087 lt	3020 / 2174lt	4531 / 3261lt
Capacità (lorda/netta)	100 HT	1705 / 1224 lt	3410 / 2448 lt	5161 / 3671 lt
Net weight (incl. side panels)	100	438 kg	687 kg	951 kg
Peso netto (con spalle)	100 HT	475 kg	742 kg	1021 kg
Refrigeration Refrigerazione		Ventilated Ventilata		
Refrigerant Refrigerante		R744; R290		
Climate class Classe climatica		3		
Operating conditions Condizioni ambientali		25 °C / 60 %RH		
Product temperature Temperatura prodotto		-1 / +5 °C		
Compressor (type) Compressore (tipologia)		1 Hermetic 1 Ermetico	2 Hermetics 2 Ermetici	3 Hermetics 3 Ermetici
Defrost Sbrinamento		Off Cycle Fermata compressore		
Power supply Alimentazione		230 V / 1 Ph / 50 Hz		

Dimensions include side panels: both panoramic and blind side panels are 40mm thick
Le dimensioni includono le spalle terminali: panoramiche o cieche, entrambi i tipi hanno 40 mm di spessore

PANDA TN P100	Model type	Total display area	Temperature class	Recommended temperature	Energy class	Energy efficiency index	Annual energy consumption	Light source type and class
Height	Length	Superficie espositiva totale	Classe di temperatura	Temperatura consigliata	Classe energetica	Indice di efficienza energetica	Consumo annuo AEC	Tipo e classe illuminazione
Altezza	Lunghezza	m²		°C		EEL	kWh/A	
H205	125 2P	3,27	M1	+2°C	B	16,11	2,893	-
	250 4P	5,24	M1	+2°C	B	19,41	5,092	-
	375 6P	7,21	M1	+2°C	C	20,68	7,135	-
H225	125 2P	3,68	M1	+2°C	B	15,22	2,993	-
	250 4P	5,88	M1	+2°C	B	18,23	5,271	-
	375 6P	8,09	M1	+2°C	B	19,35	7,387	-

Configuration: air-cooled plug-in unit R290, LED canopy lighting, non-illuminated shelves, panoramic end side panels
Configurazione: unità condensatrice plug-in R290, illuminazione LED superiore, ripiani non illuminati, spalle panoramiche

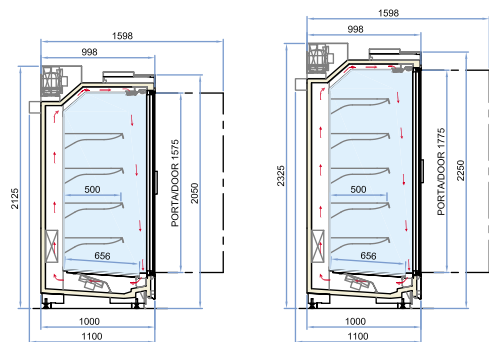


Panda TN P115

	125 2P	250 4P	375 6P	
External dimensions (LxDxH)	100	1330 x 1150 x 2100 mm	2580 x 1150 x 2100 mm	3830 x 1150 x 2100 mm
Dimensioni esterne (LxPxH)	100 HT	1330 x 1150 x 2300 mm	2580 x 1150 x 2300 mm	3830 x 1150 x 2300 mm
Capacity (gross/net)	100	1804 / 1372 lt	3608 / 2744 lt	5413 / 4116 lt
Capacità (lorda/netta)	100 HT	2025 / 1545 lt	4050 / 3090 lt	6121 / 4644 lt
Net weight (incl. side panels)	100	471 kg	732 kg	1009 kg
Peso netto (con spalle)	100 HT	508 kg	787 kg	1079 kg
Refrigeration Refrigerazione		Ventilated Ventilata		
Refrigerant Refrigerante		R744; R290		
Climate class Classe climatica		3		
Operating conditions Condizioni ambientali		25 °C / 60 %RH		
Product temperature Temperatura prodotto		-1 / +5 °C		
Compressor (type) Compressore (tipologia)		1 Hermetic 1 Ermetico	2 Hermetics 2 Ermetici	3 Hermetics 3 Ermetici
Defrost Sbrinamento		Off Cycle Fermata compressore		
Power supply Alimentazione		230 V / 1 Ph / 50 Hz		

Dimensions include side panels: both panoramic and blind side panels are 40mm thick
Le dimensioni includono le spalle terminali: panoramiche o cieche, entrambi i tipi hanno 40 mm di spessore

PANDA TN P115	Model type	Total display area	Temperature class	Recommended temperature	Energy class	Energy efficiency index	Annual energy consumption	Light source type and class
Height	Length	Superficie espositiva totale	Classe di temperatura	Temperatura consigliata	Classe energetica	Indice di efficienza energetica	Consumo annuo AEC	Tipo e classe illuminazione
Altezza	Lunghezza	m²		°C		EEL	kWh/A	
H205	125 2P	3,64	M1	+2°C	B	14,85	2,893	-
	250 4P	5,66	M1	+2°C	B	18,20	5,092	-
	375 6P	7,68	M1	+2°C	B	19,56	7,135	-
H225	125 2P	4,08	M1	+2°C	B	14,02	2,993	-
	250 4P	6,34	M1	+2°C	B	17,10	5,271	-
	375 6P	8,59	M1	+2°C	B	18,33	7,387	-

Configuration: air-cooled plug-in unit R290, LED canopy lighting, non-illuminated shelves, panoramic end side panels
Configurazione: unità condensatrice plug-in R290, illuminazione LED superiore, ripiani non illuminati, spalle panoramiche

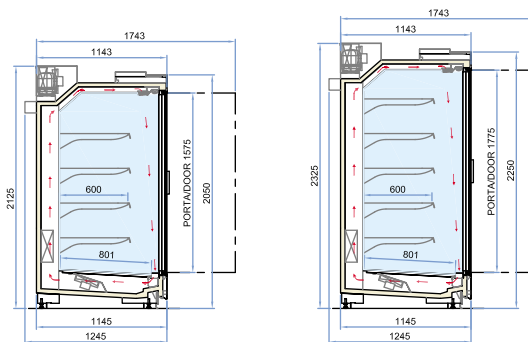

Panda TB

H 205 • 225
P 85
L 125 2p • 188 3p

3L1 frozen food & ice-cream

		TN	TB	TB/TN	TC	TC/TN	N
		Chiller	Freezer	Dual Temp	Refrigerated	Hot/Cold	Non-refrigerated
RS - Static							
RV - Ventilated							
RS/TC S - Static and Dry Heat convertible							
RV/TC S - Ventilated / Dry Heat convertible							
HUR - Meat							
CH - Chocolate							
TC S - Dry Heat							
TC BM - Bainmarie							
N - Non-refrigerated							

Installation

- Plug-in air-cooled
- Plug-in water-cooled

Temperature range
-23 / -25 °C

Refrigerant
R290

Refrigeration
Ventilated

Defrost
Hot Gas

Climate Class
3L1

Illumination

- LED lighting on canopy
- Vertical LED lighting

Side panels

- Panoramic with safety glass
- Blind

Shelves
5 grid shelves

Closing system
Triple pane glass doors

Base
4 adjustable feet

Installazione

- Plug-in ad aria
- Plug-in ad acqua

Temperatura di esercizio
-23 / -25 °C

Refrigerante
R290

Refrigerazione
Ventilata

Sbrinamento
Gas Caldo

Classe climatica
3L1

Illuminazione

- LED superiore
- Illuminazione verticale integrata

Fianchi

- Panoramici con vetro temprato
- Ciechi

Ripiani
5 ripiani a griglia

Sistema di chiusura
Porte in triplo vetro camera

Basamento
4 piedini regolabili

Available colours

Colori disponibili

- Standard / Di serie
- On request

Inside

Interno

□ Bianco

□ RAL

□ RAL

□ RAL

□ RAL

□ RAL



Panda TB

	125 2p	188 3p	
External dimensions (LxDxH) including side panels	85	1350 x 850 x 2100 mm	1980 x 850 x 2100 mm
Dimensioni esterne (LxDxH) con spalle	85 HT	1350 x 850 x 2300 mm	1980 x 850 x 2300 mm
Capacity (gross/net)	85	1308 / 955 lt	1962 / 1432 lt
Capacità (lorda/netta)	85 HT	1490 / 1088 lt	2236 / 1632 lt
Net weight	85	471 kg	707 kg
Peso netto	85 HT	508 kg	762 kg
Refrigeration Refrigerazione	Ventilated Ventilata		
Refrigerant Refrigerante	R290		
Climate class Classe climatica	3L1		
Operating conditions Condizioni ambientali	25 °C / 60 %RH		
Product temperature Temperatura prodotto	-18/ -16 °C		
Compressor (type) Compressore (tipologia)	1 Hermetic 1 Ermetico	2 Hermetics 2 Ermetici	
Defrost Sbrinamento	Hot Gas		
Power supply Alimentazione	230 V / 1 Ph / 50 Hz		

Dimensions include side panels: both panoramic and blind side panels are 50 mm thick
Le dimensioni includono le spalle terminali: panoramiche o cieche, entrambi i tipi hanno 50 mm di spessore

Height Altezza	Length Lunghezza	Model type Tipo di banco	Total display area Superficie espositiva totale m²	Temperature class Classe di temperatura	Recommended temperature Temperatura consigliata °C	Energy class Classe energetica	Energy efficiency index Indice di efficienza energetica EEI	Annual energy consumption Consumo annuo AEC kWh/A	Light source type and class Tipo e classe illuminazione
H205	125 2P	IVF2	2,75	L1	-20°C	D	38,87	9.459	-
	188 3P	IVF2	3,56	L1	-20°C	D	42,02	12.864	-
H225	125 2P	IVF2	3,14	L1	-20°C	D	36,40	9.957	-
	188 3P	IVF2	4,06	L1	-20°C	D	39,27	13.542	-

Configuration: air-cooled plug-in unit R290, vertical LED lighting, non-illuminated shelves, panoramic end side panels
Configurazione: unità condensatrice plug-in R290, illuminazione LED verticale, ripiani non illuminati, spalle panoramiche

